



LED Industrial - priemyselné svietidlá - tunelové

Model	JRE1-120	JRE1-90
-------	-----------------	----------------

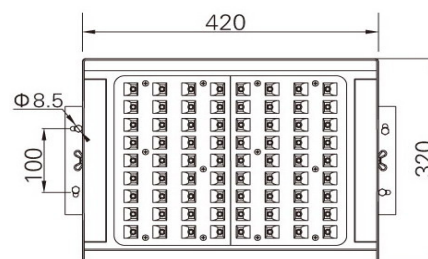

	132W	90W
Výkon	132W	90W
Typ LED	HP Osram, Edison	HP Osram, Edison
Počet LED	108	72
Svetelný tok	10229 lm	6890 lm
Rozmery mm/š x v	580x320x150	420x320x150
Váha	12 kg	8 kg
Vyžarovací uhol	120°	120°
Farba svetla	5000-7000K	5000-7000K
Napájanie	100-277VAC	100-277VAC
Pracovná teplota	-25°C ~ 50°C	-25°C ~ 50°C
CRI	Ra>80	Ra>80
Power factor	> 0.95	> 0.95
Krytie	IP66	IP66
Životnosť	> 30000H	> 30000H
Materiál	aluminum	aluminum


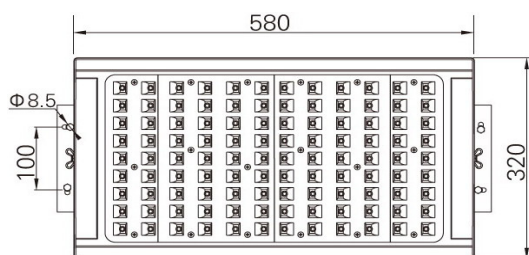


LED Industrial - priemyselné svietidlá - tunelové

Model	JRE1-60	IL-TL50
-------	---------	---------



Výkon	62W	52W
Typ LED	HP Osram, Edison	HP Cree
Počet LED	48	50
Svetelný tok	4412 lm	3500 lm
Rozmery mm/š x v	420x320x150	310x306x90
Váha	7,8 kg	5 kg
Vyžarovací uhol	120°	120°
Farba svetla	5000-7000K	6000-7000K
Napájanie	100-277VAC	100-240VAC
Pracovná teplota	-25°C~50°C	-25°C~50°C
CRI	Ra>80	Ra>80
Power factor	> 0.95	> 0.95
Krytie	IP66	IP65
Životnosť	> 30000H	> 30000H
Materiál	aluminum	aluminum, PC, tvrdené sklo

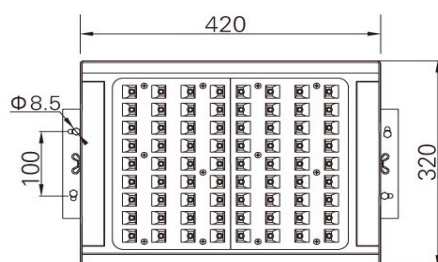


MIKRA svetlo inak, s.r.o. Zimná 94, 052 01 Spišská Nová Ves

LED Industrial - priemyselné svietidlá - tunelové

Model	IL-TL90	IL-TL120
-------	---------	----------



Výkon	95W	125W
Typ LED	HP Cree	HP Cree
Počet LED	90	120
Svetelný tok	6300 lm	8400 lm
Rozmery mm/š x v	510x306x90	660x306x90
Váha	8 kg	9,5 kg
Vyžarovací uhol	120°	120°
Farba svetla	6000-7000K	6000-7000K
Napájanie	100-240VAC	100-240VAC
Pracovná teplota	-25°C~50°C	-25°C~50°C
CRI	Ra>80	Ra>80
Power factor	>0.95	>0.95
Krytie	IP65	IP65
Životnosť	>30000H	>30000H
Materiál	aluminum, PC, tvrdené sklo	aluminum, PC, tvrdené sklo


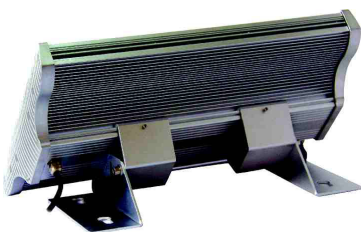


LED Industrial - priemyselné svietidlá - tunelové

Model	BL-FW360	BL-FW600
-------	----------	----------




Výkon	20-80W	100-150W
Typ LED	HP Bridgelux	HP Bridgelux
Počet LED	1	2
Svetelný tok	80 lm/W	80 lm/W
Rozmery mm/š x v	393x285x186	600x285x186
Váha	7,4 kg	10,6 kg
Vyžarovací uhol	65°	65°
Farba svetla	2700-7000K	2700-7000K
Napájanie	85-265VAC	85-265VAC
Pracovná teplota	-25°C ~ 50°C	-25°C ~ 50°C
CRI	Ra>80	Ra>80
Power factor	> 0.95	> 0.95
Krytie	IP65	IP65
Životnosť	50000 hod	50000 hod
Materiál	aluminum	aluminum

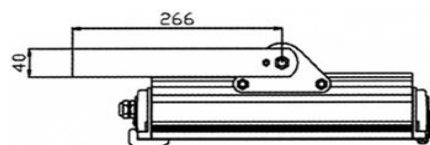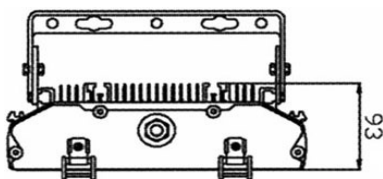

LED Industrial - priemyselné svietidlá - tunelové

Model	LQ-TL370	LQ-TL570
-------	----------	----------



Výkon	50-80W	80-140W
Typ LED	HP Bridgelux	HP Bridgelux
Počet LED	1	2
Svetelný tok	70 lm/W	70 lm/W
Rozmery mm/š x v	393x285x93	593x285x93
Váha	7,4 kg	10,6 kg
Vyžarovací uhol	130°	130°
Farba svetla	2700-7000K	2700-7000K
Napájanie	85-265VAC	85-265VAC
Pracovná teplota	-25°C ~ 50°C	-25°C ~ 50°C
CRI	Ra>80	Ra>80
Power factor	> 0.95	> 0.95
Krytie	IP65	IP65
Životnosť	50000 hod	50000 hod
Materiál	aluminum	aluminum

